

Test Report

Product Name:	1030nm DFB Laser	Test By:	03
P/N:	BNLD-1030-2HPM-FA	Test Date:	2026/4/17

Temperature: 25°C(15~35°C)


Wavelength range: 1030 ± 2nm

Output power range: ≥200mW


Operating current < 500mA

Pigtail type: PM fiber; FC/APC connector

S/N	TX							
	Center wavelength	Operating current	Threshold current	Bias voltage	Monitor PD current	SMSR	Spectral width-3dB	Rxtinction ratio
	λ_p (nm)	I_o (mA)	I_{TH} (mA)	V_f (V)	I_m (μ A)	SMSR(dB)	$\Delta\lambda$ (nm)	PER(dB)
2603300001	1031.22	500.00	38.50	2.31	321.64	50.44	0.041	25.77

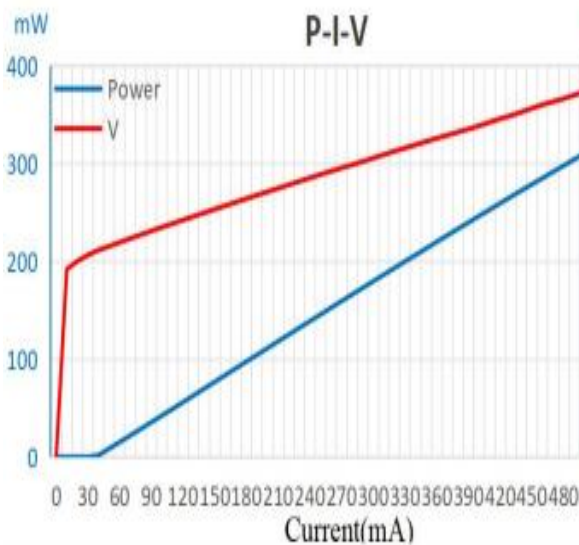


PIV Curve

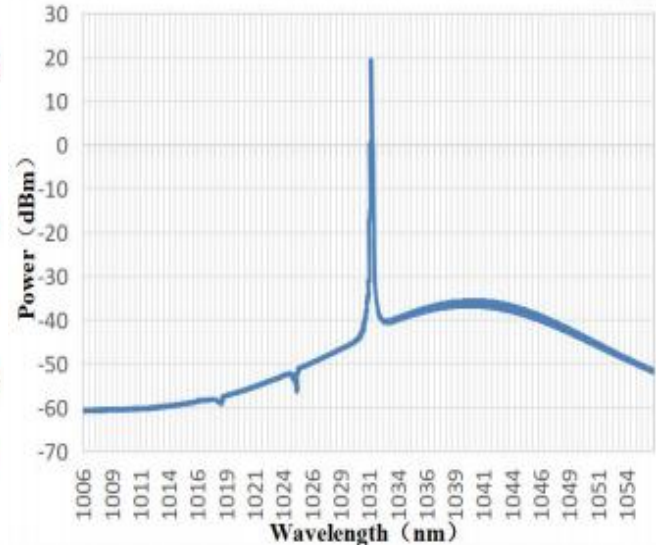

Optical mapping

PIN Definition:

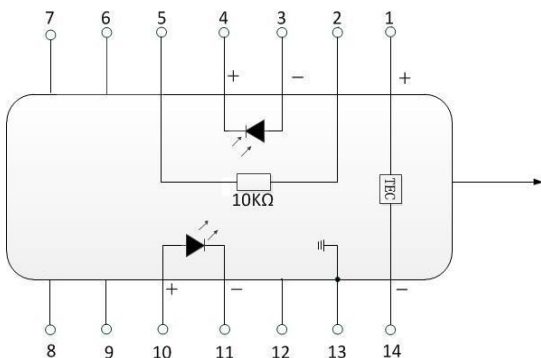

1	TEC(+)	14	TEC(-)
2	Thermistor	13	Case Ground
3	PD Monitor Anode (-)	12	NC
4	PD Monitor cathode(+)	11	Laser Cathode (-)
5	Thermistor	10	Laser Anode (+)
6	NC	9	NC
7	NC	8	NC

Attention notes

1. The electric sensitive element, please obey the static sensitive element protection
2. Pins is easy to break, please don't bend it for big angle.
3. The fiber is easy to break, when bend the fiber, the radius must is up to 20mm;
4. Ensure the plane of fiber connection is clean, which will influence the function of module.